


SIDEWALK LOCATION

*DISTANCE DETERMINED BY WIDTH OF SIGN.

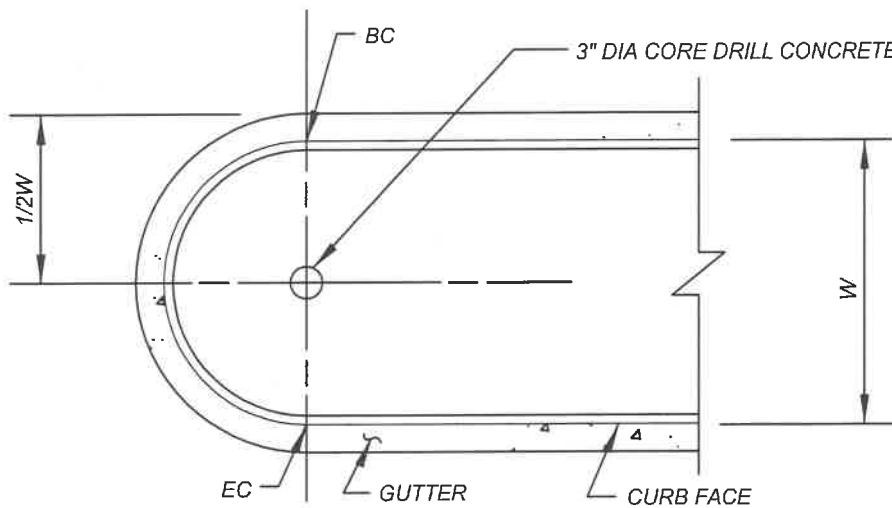

MEDIAN LOCATION

NOTES:

- 1.) SIGN POST 3" CORE DRILL SHALL BE USED FOR ANY SIGN IN CONCRETE.
- 2.) SIGNS LARGER THAN 48 INCHES OR LOCATIONS WHERE SIDEWALKS ARE LESS THAN 5 FEET WIDE, SIGN POST MUST BE INSTALLED BEHIND THE SIDEWALK.
- 3.) SEE STANDARD PLAN NO. MVS1-115D-0 FOR SIDEWALK PLACEMENT AROUND OBSTRUCTIONS.

NOT TO SCALE

	RECOMMENDED: <i>EL</i> DIVISION MANAGER	<i>5/14/19</i> DATE	CITY OF MORENO VALLEY PUBLIC WORKS DEPARTMENT - TRANSPORTATION ENGINEERING DIVISION	STANDARD PLAN MVLT-414C-0
	APPROVED: <i>MAL. WOLFE</i> PUBLIC WORKS DIRECTOR/ CITY ENGINEER	<i>6/4/19</i> DATE		SIGN POST BLOCK OUT